



ESTPLY® MUTE

Birch plywood sandwich panel featuring a 3 mm rubber layer for enhanced sound reduction. Designed for interior applications such as walls, ceilings, floors, and use in the transportation industry.



Effective sound
reduction



Dimensional
stability



Easy machining
and installation




Environmentally
friendly

TECHNICAL SPECIFICATIONS

Thickness	Structure (ply + rubber + ply)	Weight	Sound reduction indexes
16 mm	6.5 + 3 + 6.5 mm	16.3 kg/m ²	35 (-1; -4) dB
18 mm	6.5 + 3 + 9.0 mm	17.4 kg/m ²	
21 mm	9.0 + 3 + 9.0 mm	19.5 kg/m ²	35 (-1; -3) dB

Other thicknesses available upon request.

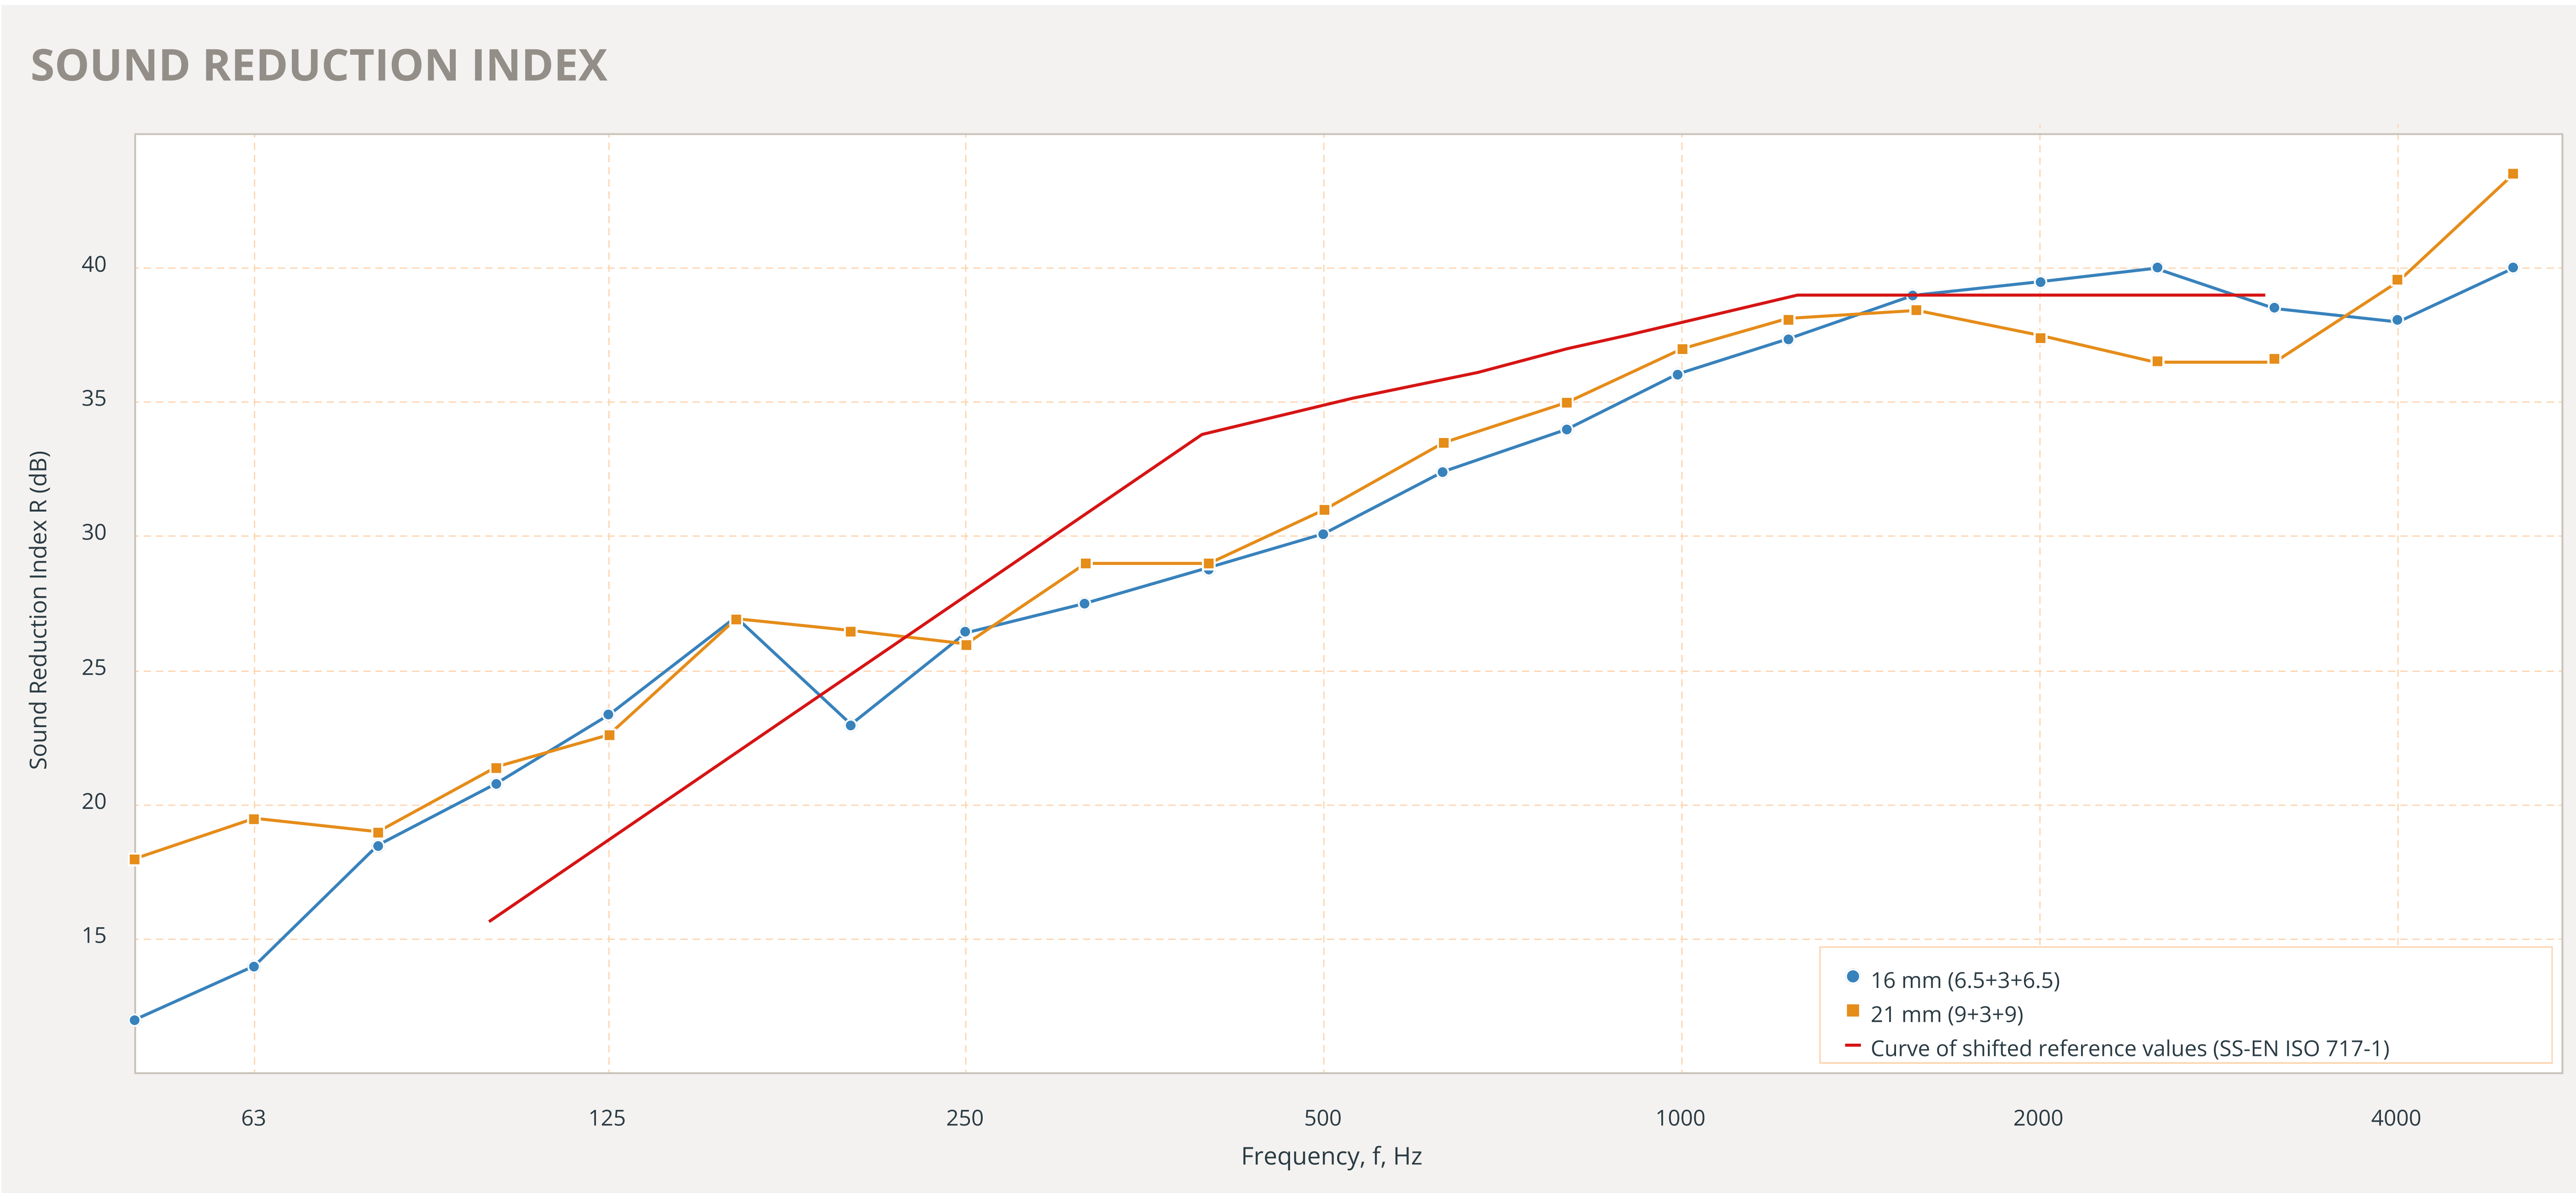

PROPERTIES & COMPLIANCE

Fire rating ECE Reg. No. 118. Annex 8 (vertical and horizontal use)	Surface BB/BB quality. Sanded, ready for finishing.	Gluing EN 314-2 class 3. Exterior
Formaldehyde emission E0.5 compliant	Gluing EN 314-2 class 3. Exterior	Panel sizes 1500/1525x2500/3000/3050 mm

Other sizes available upon request.



Certified Management Systems